


# Carolprene® Jacketed Types S00W/SJ00W

90°C, 300 and 600 Volt, UL/CSA Portable Cord

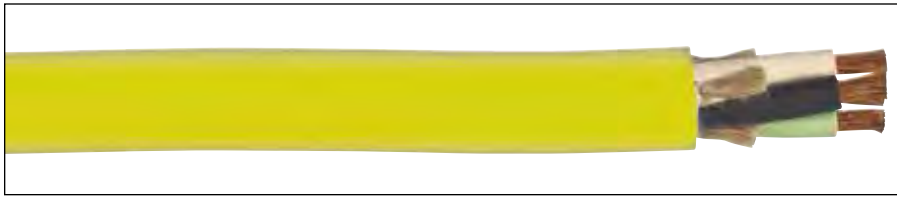

### YELLOW HIGH-VISIBILITY – TYPE SJ00W – 300 VOLT – 90°C – UL/CSA

CATALOG NUMBER	NO. OF COND	AWG SIZE	COND. STRAND	NOMINAL INS. THICKNESS		NOMINAL O.D.		CURRENT AMPS†	APPROX. NET WT. LBS/M <sup>(S)</sup>	STD. CTN.
				INCHES	mm	INCHES	mm			
01411	3	18	16/30	0.030	0.76	0.305	7.75	10	63	1000'
01444	4	18	16/30	0.030	0.76	0.330	8.38	7	76	250'
01442	3	16	26/30	0.030	0.76	0.330	8.38	13	76	250'
01443	4	16	26/30	0.030	0.76	0.365	9.27	10	95	250'
01460	3	14	41/30	0.030	0.76	0.370	9.40	18	106	250'
01464	4	14	41/30	0.030	0.76	0.410	10.41	15	121	250'
01480	3	12	65/30	0.030	0.76	0.430	10.92	25	146	250'
01481	4	12	65/30	0.030	0.76	0.475	12.07	20	185	250'
01483	3	10	104/30	0.045	1.14	0.580	14.73	30	242	250'
01484	4	10	104/30	0.045	1.14	0.655	16.64	25	304	250'

### YELLOW HIGH-VISIBILITY – TYPE S00W – 600 VOLT – 90°C – UL/CSA

CATALOG NUMBER	NO. OF COND	AWG SIZE	COND. STRAND	NOMINAL INS. THICKNESS		NOMINAL O.D.		CURRENT AMPS†	APPROX. NET WT. LBS/M <sup>(S)</sup>	STD. CTN.
				INCHES	mm	INCHES	mm			
02469	3	18	16/30	0.030	0.76	0.365	9.27	10	84	250'
02470	4	18	16/30	0.030	0.76	0.390	9.91	7	101	250'
02465	3	16	26/30	0.030	0.76	0.390	9.91	13	103	250'
02466	4	16	26/30	0.030	0.76	0.420	10.67	10	119	250'
02462	3	14	41/30	0.045	1.14	0.535	13.59	18	172	250'
02468	4	14	41/30	0.045	1.14	0.575	14.61	15	208	250'
02425	3	12	65/30	0.045	1.14	0.595	15.11	25	229	250'
02426	4	12	65/30	0.045	1.14	0.650	16.51	20	280	250'
02428	3	10	104/30	0.045	1.14	0.660	16.76	30	295	250'
02427	4	10	104/30	0.045	1.14	0.715	18.16	25	353	250'

Cord furnished with UL and CSA labels.

† Green conductor for grounding only. Ampacities based on NEC Table 400.5(A)(1).

©Actual shipping weight may vary.



800.633.6339 • www.lapptannehill.com

#### Product Construction:

##### Conductors:

- 18 through 10 AWG fully annealed stranded bare copper

##### Insulation:

- Premium-grade, color-coded 90°C EPDM
- Color code: See chart below

##### Jacket:

- Yellow Carolprene®
- Temperature range: -40°C to +90°C

##### Jacket Marking:

- CAROL (SIZE) (mm<sup>2</sup>) 90°C (UL) WATER RESISTANT SJ00W CSA (-40°C) FT2 P-7K-123033 MSHA 300 VOLT ROHS MADE IN USA (TRU-MARK SEQUENTIAL FOOTAGE)
- CAROL (SIZE) (mm<sup>2</sup>) 90°C (UL) WATER RESISTANT S00W CSA (-40°C) FT2 P-7K-123033 MSHA 600 VOLT ROHS MADE IN USA (TRU-MARK SEQUENTIAL FOOTAGE)

#### Applications:

- Portable tools and equipment
- Portable appliances
- Small motors and associated machinery
- Food processing plants and equipment
- Marinas/docks
- Shipyards
- OEM/MRO
- OSHA VPP safety
- Construction site power
- Industrial plants
- Mining

#### Features:

- Excellent resistance to oil and moisture
- Good tensile strength, elongation and aging characteristics
- High flexibility
- Excellent abrasion resistance
- Water-resistant\*
- UL Listed and CSA Certified for indoor and outdoor use
- Ozone-, sunlight (UV)- and weather-resistant
- TRU-Mark® sequential footage marking

#### Industry Approvals:

- UL Flexible Cord - UL 62
- CSA Flexible Cord - C22.2-49
- MSHA Approved
- RoHS Compliant

#### Packaging:

- 250' (76.2 m), 1000' (304.8 m)
- Other put-ups available on special order

\* Suitable for immersion in water if properly sealed and terminated.

#### COLOR CODE CHART

NO. OF CONDUCTORS	COLOR
3	Black, White, Green
4	Black, White, Red, Green

